

 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

锂离子电池产品规格书
Lithium-ion Battery Product Specification

型号: DLP50160118-100Ah

Model: DLP50160118-100Ah

规格:

EES-LIB-LFP/C-L-HS-Cell-3.2V-170W-160W-340W • h-320W • h-DLP50160118

Specification:

EES-LIB-LFP/C-L-HS-Cell-3.2V-170W-160W-340W • h-320W • h-DLP50160118

编制 Prepared		审核 Checked		批准 Approved	
会签 Signature:					
客户确认 Customer Approval	公司名称 Company				
	签字 Signature				
	盖章 Company signet				

 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

版本变更记录

Version History

序号 Serial No.	版本 Version	修改说明 Revision	编写 Author	审核 Checked	批准 Approved	日期 Date
1	V01	新制订				2022/9/12
2	V02	根据 GB/T 36276-2023 版修改				2024/7/1

 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

目录

1. 目的 Purpose.....	2
2. 适用范围 Scope.....	2
3. 电池描述 Battery Specification.....	2
4. 电池规格 Battery Property.....	2
5. 电芯外部界面参数 External interface parameters of battery.....	4
6. 电芯外观尺寸 Appearance and Dimension.....	6
7. 标准测试环境 Standard Test Conditions.....	6
8. 电池性能及测试方法 Performances and Test Method.....	6
8.1 标准充放电方法 Standard Charge method.....	6
8.2 电性能参数 Electrochemistry performance.....	7
8.3 安全性能 Safety Performances.....	12
9. 警告及注意事项 Warning and Cautions.....	15
10. 应用条件 Application conditions.....	16
11. 运输及存放 Shipment and Storage.....	19
12. 其他 Others.....	19

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

1. 目的 Purpose

为建立健全的公司技术资料，确保产品质量，用于指导产品生产、出货。方便与客户确认产品规格，并达成一致，制定本产品规格书。

The specification sheet is designed to build up and improve technical documentation so as to instruct production and product shipment and consequently guarantee product quality. At the same time, it is convenient for to confirm product specifications with customers and finally reach an agreement.

2. 适用范围 Scope

本产品规格书规定了电芯的类型、尺寸、结构、电化学性能、安全性能及注意事项，本标准仅适用于湖南德赛电池有限公司生产的电芯。

This product specification describes the type, size, structure, electrochemistry performance, safety characteristics, warning and cautions of the cell. This specification only applies to the cell that supplied by Hunan Desay Battery Co., Ltd.

3. 电池描述 Battery Specification

3.1 型号: DLP50160118-100Ah

Model : DLP50160118-100Ah

3.2规格:

EES-LIB-LFP/C-L-HS-Cell-3.2V-170W-160W-340W • h-320W • h-DLP50160118

Specification: EES-LIB-LFP/C-L-HS-Cell-3.2V-170W-160W-340W • h-320W • h-DLP50160118

备注：规格标识规则：EES(电力储能用)-LIB(锂离子电池)-A1/A2(电池正极/负极材料)-A3(电解质类型)-A4(壳体类型)-Level(电池层级)-U_{nom}(标称电压)-P_{rc}(额定充电功率)-P_{rd}(额定放电功率)-E_{rc}(额定充电能量)-E_{rd}(额定放电能量)-A5(电池型号)

Remarks: Specification marking rules: EES(Electrical energy storage)-LIB(Lithium ion battery)-A1/A2(Battery positive/negative material)-A3(Electrolyte morphology)-A4(Shell type)-Level (Hierarchy(Cell/Module/Cluster))-U_{nom}(Nominal voltage)-P_{rc}(Rated charging power)-P_{rd}(Rated Discharging power)-E_{rc}(Rated charging energy)-E_{rd}(Rated discharging energy)-A5(Battery model)

4. 电池规格 Battery Property

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

项目 Item	标准 Specification
标称容量 Nominal capacity	102Ah(25±2℃, P _{rc} /P _{rd} , 3.65-2.5V, BOL)
额定容量 Rated capacity	100Ah(25±2℃, P _{rc} /P _{rd} , 3.65-2.5V, BOL)
额定充电能量 Rated charging energy	340Wh(25±2℃, P _{rc} /P _{rd} , 3.65-2.5V, BOL)
额定放电能量 Rated discharging energy	320Wh(25±2℃, P _{rc} /P _{rd} , 3.65-2.5V, BOL)
质量能量密度 Mass energy density	155Wh/kg (P _{rc} /P _{rd})
体积能量密度 Volume energy density	350Wh/L (P _{rc} /P _{rd})
充电截止电压 Charging cut-off voltage	3.65V
放电截止电压 Discharging cut-off voltage	2.5V(> 0℃), 2.0V(≤0℃)
标称电压 Nominal voltage	3.2V
额定充电功率 Rated charging power	170W(P _{rc})
最大持续充电功率 Maximum continuous charging power	340W(2P _{rc})
最大持续放电功率 Maximum continuous discharging power	320W(2P _{rd})
最大脉冲放电电流 Maximum pulse discharging current	300A (3.0C/30s, SOC≥40%, T<50℃)
电池重量 Cell Weight	1.965±0.1 kg

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

电池尺寸 Cell Dimension	厚度: 49.9±0.5mm 宽度: 159.9±0.5mm 高度: 119.0±0.5mm Thickness:49.9±0.5mm Width: 159.9±0.5mm Height: 119.0±0.5mm
使用温度 Operating Temperature	充电: 0 ~ 55℃ 放电: -20 ~ 55℃ Charge: 0 ~ 55℃ Discharge: -20 ~ 55℃
存储温度 Storage Temperature	-30~60℃（若预计电池存放30天以上，应每隔三个月将SOC调整为50%左右） -30~60℃ (if the battery is expected to be stored for more than 30 days, the SOC should be adjusted to 50% every three months)
存储湿度 Storage humidity	≤ 95% ROH, 无凝露 ≤ 95% ROH, no condensation
应用海拔 Altitude	≤4500m
电芯下线状态 Shipment status	17~40%SOC
月自放电 Residual capacity loss	≤3%/月（30~50% SOC，25±2℃） Per month ≤3.0%(30~50% SOC，25±2℃)

5. 电芯外部界面参数 External interface parameters of battery


项目 Item	标准 Specification
极柱直径 Diameter of pole	16±0.2mm
极柱焊接区域边界 Pole welding area boundary	可焊接区域: φ 2.8~ φ 14.0mm 最大熔深: 2.2mm 焊接温度150℃，时间≤5s 焊接前后密封圈压缩量的变化量≤10% 焊接过程中不允许出现极柱塑胶熔融现象

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

	Welding area: $\phi 2.8 \sim \phi 14.0\text{mm}$ Maximum penetration: 2.2mm Welding temperature: 150°C, time $\leq 5\text{s}$ Change in compression of the sealing ring before and after welding: $\leq 10\%$ Melting of plastic at the pole is strictly prohibited during welding.	
极柱定位孔要求 Requirements for pole location hole	直径 $2.8 \pm 0.2\text{mm}$ 圆柱孔+直径 $2.8 \pm 0.2\text{mm}$ 圆锥孔 Diameter $2.8 \pm 0.2\text{mm}$ cylindrical bore + diameter $2.8 \pm 0.2\text{mm}$ tapered bore	
极柱承受挤压力要求 Extrusion pressure requirement for the pole	+Z 方向最大: 500N -Z 方向最大: 500N +Z direction Max: 500N -Z direction Max: 500N	
极柱承受剪切力要求 Shear pressure requirements for the pole	X Y方向最大: 500N X Y direction Max: 500N	
极柱承受扭力要求 Torsion requirements for the pole	$\leq 6\text{ Nm}$	
对电芯Busbar焊接时施加预紧力及预紧力规格	电芯顶盖可承受的压力规格: 最大500N The pressure for the battery top: 500N Max	
组装预紧力要求 Preload requirements for assembly	500~5000N, 电芯均匀受力壳体无变形 500~5000N, no deformation of the shell with uniform stress on the battery	
循环预紧力要求 Preload requirements during the cycle	200~300Kgf	
电芯膨胀力(寿命周期内) The expansion pressure of the battery (life cycle)	电芯最大膨胀力 $\leq 36\text{KN}$, 衰减至80% 电芯最大膨胀力 $\leq 50\text{KN}$, 衰减至70% The maximum expansion pressure of the battery $\leq 36\text{KN}$, fading to 80% The maximum expansion pressure of the battery $\leq 50\text{KN}$, fading to 70%	
电芯能够承受的最大膨胀力 The maximum expansion pressure of the battery	64KN	
电芯二维码等级 Battery QR code level	$\geq \text{C class}$	

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

6.电芯外观尺寸（单位：毫米） Appearance and Dimension (Unit: mm)

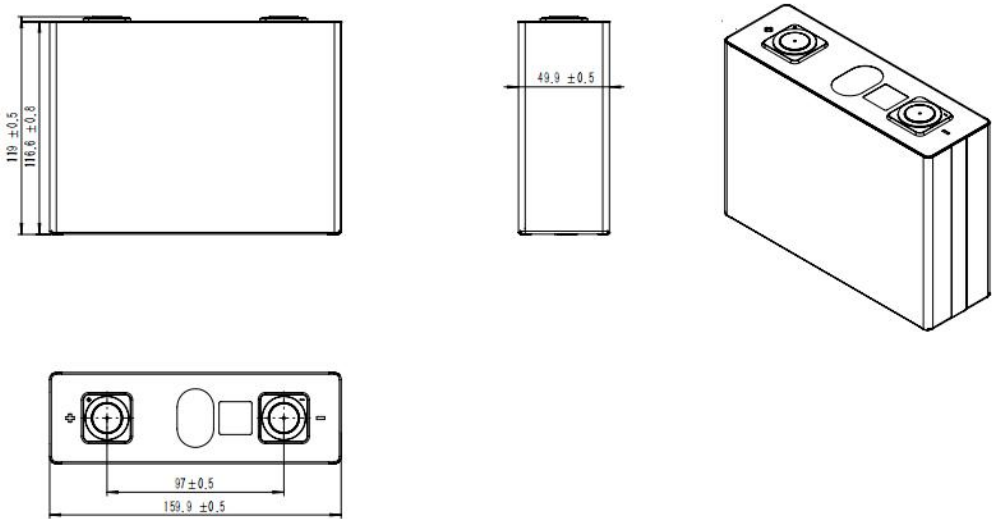

电芯的外观尺寸图

Appearance and Dimension of cell

电池外观应没有漏液、污渍、破损、明显划痕等影响商业价值的缺陷存在。

There shall be no such defect as leakage, scratch, damaged, obvious scratch which may adversely affect commercial.

7. 标准测试环境 Standard Test Conditions

测试环境：除另作说明，所有的测试的标准测试环境是：温度 $25\pm 2^{\circ}\text{C}$ ，湿度15%~90%，大气压86kPa~106kPa。

Standard environmental conditions: Unless otherwise specified, all tests stated in this specification are conducted at temperature $25\pm 2^{\circ}\text{C}$, humidity 15%~90% and air pressure between 86kPa to 106kPa.

8. 电池性能及测试方法 Performances and Test Method

8.1 标准充电方法：电池以 P_{rc} 恒功率充电至3.65V，静置10min。

标准放电方法：电池以 P_{rd} 恒功率放电至2.5V停止，静置10min。

初始化充电方法：将电芯在 $25\pm 2^{\circ}\text{C}$ 下静置5h，电池按照标准放电后再进行标准充电。

初始化放电方法：将电芯在 $25\pm 2^{\circ}\text{C}$ 下静置5h，电池按照标准充电后再进行标准放电。

Standard charging: Charge the cell with constant power P_{rc} to 3.65V, rest 10min.

Standard discharging: Discharging the cell with constant power P_{rd} to 2.5V, rest 10min.

Initialized charging: Leave the cell at $25\pm 2^{\circ}\text{C}$ for 5h, the cell according to standard discharge then according to standard charge.

序号	标注	尺寸	公差	备注
1	总高度	119.0	± 0.5	
2	宽度	159.9	± 0.5	
3	厚度	49.9	± 0.5	
4	中心距	97	± 0.5	
备注:使用平板测厚仪，测量压力 2kN，3sec				

 DESAY 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

Initialized discharging: Leave the cell at 25±2 °C for 5h, the cell according to standard charge then according to standard discharge.

8.2 电性能参数 Electrochemistry performance

序号 No	项目 Item	标准 Criteria	测试方法和环境 Test Method and Condition
1	额定容量 Rated Capacity	≥100Ah	电池按标准方法充放电，重复 3 次，以 3 次试验的放电容量均值为结果 The battery was charged and discharged according to the standard method, repeated 3 times, to test three times the mean discharge capacity for results.
2	交流内阻 ACR	≤0.36 mΩ	在 50%SOC, 1kHz 的频率下测试。 AC impedance of the cell is measured at 1kHz and 50%SOC after standard charging.
3	初始充放电性能 Initialized charging/discharging performance	初始充电能量≥额定充电能量 初始放电能量≥额定放电能量 5℃的初始能量效率≥80% 25℃的初始能量效率≥93% 45℃的初始能量效率≥93% Initialized charging energy ≥ Rated charging energy Initialized discharging energy ≥ Rated discharging energy 5℃ Energy efficiency ≥80% 25℃ Energy efficiency ≥93% 45℃ Energy efficiency ≥93%	25±2℃初始充放电性能: 1)电池单体初始化放电; 2)P_{re} 恒功率充电至终止电压, 静置 10min; 3)P_{rd} 恒功率放电至终止电压, 静置 10min。 45±2℃初始充放电性能: 1)电池单体初始化放电; 2)在 45±2℃下搁置 16h; 3)在 45±2℃下, P_{re} 恒功率充电至终止电压, 静置 10min; 4)在 45±2℃下, P_{rd} 恒功率放电至终止电压, 静置 10mi。 5±2℃初始充放电性能: 1)电池单体初始化放电; 2)在 5±2℃下搁置 20h; 3)在 5±2℃下, P_{re} 恒功率充电至终止电压, 静置 10min; 4)在 5±2℃下, P_{rd} 恒功率放电至终止电压, 静置 10min。 25±2℃ initialized charge/discharge performance: 1)Initialized discharge the battery; 2)Charge the battery to the termination voltage at a constant power of P_{re}, and rest for 10min;

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

			3)Discharge the battery to the termination voltage at a constant power of P_{rd}, and rest for 10min. 45±2°C initialized charge/discharge performance: 1)Initialized discharge the battery; 2)The battery is left to rest for 16h at 45±2°C; 3)At 45±2°C, charge the battery to the termination voltage at a constant power of P_{rc}, and rest for 10min; 4)At 45±2°C, discharge the battery to the termination voltage at a constant power of P_{rd}, and rest for 10min. 5±2°C initialized charge/discharge performance: 1)Initialized discharge the battery; 2)The battery is left to rest for 20h at 5±2°C; 3)At 5±2°C, charge the battery to the termination voltage at a constant power of P_{rc}, and rest for 10min; 4)At 5±2°C, discharge the battery to the termination voltage at a constant power of P_{rd}, and rest for 10min.	
4	高海拔初始充放电性能 Initialized charging/discharge performance in high altitude	初始充电能量≥额定充电能量 初始放电能量≥额定放电能量 能量效率≥93% Initialized charging energy ≥ Rated charging energy Initialized discharging energy ≥ Rated discharging energy Energy efficiency ≥93%	1)电池单体初始化放电; 2)将电池置于低气压试验装置中, 设置试验气压, 在 25±2°C下静置 6h; 3)以 P_{rc} 恒功率充电至终止电压, 静置 10min; 4)以 P_{rd} 恒功率放电至终止电压, 静置 10min; 1)Initialized discharge the battery; 2)Place the battery in a low-pressure test device, set the test pressure, and left it to rest for 6h at 25±2°C; 3)Charge the battery to the termination voltage at a constant power of P_{rc}, and rest for 10min; 4)Discharge the battery to the termination voltage at a constant power of P_{rd}, and rest for 10min.	

	锂离子电池产品规格书		文件编号/版本
	Lithium-ion Battery Product Specification		Controlled No./Version
	Model: DLP50160118-100Ah		A00/V02

5	功率特性 Power characteristic	不同充放电功率条件下: 充电能量≥额定充电能量 放电能量≥额定放电能量 能量效率≥93% Under different charging/discharging power conditions: Charging energy ≥ Rated charging energy Discharging energy ≥ Rated discharging energy Energy efficiency ≥93%	1)在 25±2℃下静置 5h; 2)以 100%P_{rd} 恒功率放电至终止电压, 静置 10min; 3)以 100%P_{rc} 恒功率充电至终止电压, 静置 10min; 4)以 100%P_{rd} 恒功率放电至终止电压, 静置 10min; 5)以额定充放电功率的 5%为步长, 逐次递减充放电功率至 5%额定充放电功率, 重复步骤 2)~4)。 1)The battery is left to rest for 5h at 25±2°C; 2)Discharge the battery to the termination voltage at a constant power of 100%P_{rd}, and rest for 10min; 3)Charge the battery to the termination voltage at a constant power of 100%P_{rc}, and rest for 10min; 4)Discharge the battery to the termination voltage at a constant power of 100%P_{rd}, and rest for 10min.; 5)Repeat steps 2)~4), take 5% of the rated charging/discharging power as a step, reduce the charging/discharging power to 5% of the rated charging/discharging power one by one.
	倍率充放电性能 Rate charging/discharging performance	2P_{rc}/P_{rc} 条件下的充电能量保持率 ≥95% 2P_{rd}/P_{rd} 条件下的放电能量保持率 ≥95% 2P_{rc}/2P_{rd} 条件下的能量效率≥90% 2P_{rc}/P_{rc} Charge energy retention rate ≥95% 2P_{rd}/P_{rd} discharge energy retention rate ≥95% 2P_{rc}/2P_{rd} energy	1)电池单体初始化放电; 2)以 P_{rc} 恒功率充电至终止电压, 静置 10min; 3)以 P_{rd} 恒功率放电至终止电压, 静置 10min; 4)以 2P_{rc} 恒功率充电至终止电压, 静置 10min; 5)以 P_{rc} 恒功率充电至终止电压, 静置 10min; 6)以 2P_{rd} 恒功率放电至终止电压, 静置 10min; 7)以 P_{rd} 恒功率放电至终止电压, 静置 10min; 8)以 2P_{rc} 恒功率充电至终止电压, 静置 10min; 9)以 2P_{rd} 恒功率放电至终止电压。 1)Initialized discharge the battery; 2)Charge the battery to the termination voltage at a constant power of P_{rc}, and rest for 10min; 3)Discharge the battery to the termination voltage at a constant power of P_{rd}, and rest for 10min;

 DESAY 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

		efficiency $\geq 90\%$	4)Charge the battery to the termination voltage at a constant power of $2P_{rc}$, and rest for 10min; 5)Charge the battery to the termination voltage at a constant power of P_{rc} , and rest for 10min; 6)Discharge the battery to the termination voltage at a constant power of $2P_{rd}$, and rest for 10min; 7)Discharge the battery to the termination voltage at a constant power of P_{rd} and rest for 10min; 8)Charge the battery to the termination voltage at a constant power of $2P_{rc}$, and rest for 10min; 9)Discharge the battery to the termination voltage at a constant power of $2P_{rd}$.
7	能量保持与能量恢复能力 Energy retention and energy recovery	能量保持率 $\geq 95\%$ 充电能量恢复率 $\geq 95\%$ 放电能量恢复率 $\geq 95\%$ Retention rate of energy $\geq 95\%$ Recovery rate of charging energy $\geq 95\%$ Recovery rate of discharging energy $\geq 95\%$	1)电池单体初始化充电; 2)在 $45\pm 2^{\circ}\text{C}$ 静置 30d; 3)在 $25\pm 2^{\circ}\text{C}$ 静置 5h; 4)以 P_{rd} 恒功率放电至终止电压, 静置 10min; 5)以 P_{rc} 恒功率充电至终止电压, 静置 10min; 6)以 P_{rd} 恒功率放电至终止电压。 1)Initialized charge the battery; 2)The battery is left to rest for 30d at $45\pm 2^{\circ}\text{C}$; 3)The battery is left to rest for 5h at $25\pm 2^{\circ}\text{C}$; 4)Discharge the battery to the termination voltage at a constant power of P_{rd} , and rest for 10min; 5)Charge the battery to the termination voltage at a constant power of P_{rc} , and rest for 10min; 6)Discharge the battery to the termination voltage at a constant power of P_{rd} .
8	低温适应性 Low temperature adaptability	充电能量 $\geq$ 额定充电能量 放电能量 $\geq$ 额定放电能量 能量效率 $\geq 93\%$ Charging energy $\geq$ Rated charging energy	1)电池单体初始化充电; 2)在 $-30\pm 2^{\circ}\text{C}$ 静置 24h; 3)在 $25\pm 2^{\circ}\text{C}$ 静置 24h; 4)以 P_{rd} 恒功率放电至终止电压, 静置 10min; 5)以 P_{rc} 恒功率充电至终止电压, 静置 10min; 6)以 P_{rd} 恒功率放电至终止电压。 1)Initialized charge the battery; 2)The battery is left to rest for 24h at $-30\pm 2^{\circ}\text{C}$;

 DESAY 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

		Discharging energy ≥ Rated discharging energy Energy efficiency ≥93%	3)The battery is left to rest for 24h at 25±2℃; 4)Discharge the battery to the termination voltage at a constant power of P _{rd} , and rest for 10min; 5)Charge the battery to the termination voltage at a constant power of P _{rc} , and rest for 10min; 6)Discharge the battery to the termination voltage at a constant power of P _{rd} .
9	高温适应性 High temperature adaptability	充电能量≥额定充电能量 放电能量≥额定放电能量 能量效率≥93% Charging energy ≥ Rated charging energy Discharging energy ≥ Rated discharging energy Energy efficiency ≥93%	1)电池单体初始化充电; 2)在 50±2℃静置 24h; 3)在 25±2℃静置 12h; 4)以 P _{rd} 恒功率放电至终止电压, 静置 10min, 5)以 P _{rc} 恒功率充电至终止电压, 静置 10min; 6)以 P _{rd} 恒功率放电至终止电压。 1)Initialized charge the battery; 2)The battery is left to rest for 24h at 50±2℃; 3)The battery is left to rest for 12h at 25±2℃; 4)Discharge the battery to the termination voltage at a constant power of P _{rd} , and rest for 10min; 5)Charge the battery to the termination voltage at a constant power of P _{rc} , and rest for 10min; 6)Discharge the battery to the termination voltage at a constant power of P _{rd} .
10	循环性能 Cycle Life	3000 次循环, 容量≥80Ah 3000 cycles, Remaining capacity≥80Ah	25℃, 在 200±20 kgf 的压力条件下, 电池进行标准充放电, 循环 3000 次。测试电芯当前容量。在 (25±2)℃下, 当前容量标定测试按照下列步骤进行: a)电池以 0.5C 电流恒流放电至终止电压, 静置 30min; b)以 0.5C 电流恒流恒压充电至终止电压, 截止电流 0.05C, 静置 30min; c)电池以 0.5C 电流恒流放电至终止电压, 静置 30min, 记录此时容量为当前容量。 25℃, Under the pressure condition of 200±20 kgf, the battery was charged and discharged standardly, Circular 3000 times. Test batteries current capacity. Under (25±2)℃, the current capacity calibration test according to the following steps: a) Cell with 0.5C current to constant exile electric voltage, let stand for 30 min.

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

			b) Charge at a constant current and voltage of 0.5C to the termination voltage, with a cut-off current of 0.05C, let stand for 30 min. c) Battery in 0.5C current to constant exile electric voltage, let stand for 30 min, record the capacity of current capacity.	
11	贮存性能 Storage	充电能量恢复率 ≥96.5% 放电能量恢复率 ≥96.5% Recovery rate of charging energy ≥ 96.5% Recovery rate of discharging energy ≥ 96.5%	1) 电池单体初始化充电; 2) 以 P_{rd} 恒功率放电至放电能量达该电池初始放电能量的 50%。 3) 在 $50\pm2^{\circ}\text{C}$ 静置 30d; 4) 在 $25\pm2^{\circ}\text{C}$ 静置 5h; 5) 以 P_{rd} 恒功率放电至终止电压, 静置 10min; 6) 以 P_{rc} 恒功率充电至终止电压, 静置 10min; 7) 以 P_{rd} 恒功率放电至终止电压。 1) Initialized charge the battery; 2) Discharge the battery to 50% of the initialized discharging energy at a constant power of P_{rd} ; 3) The battery is left to rest for 30d at $50\pm2^{\circ}\text{C}$; 4) The battery is left to rest for 5h at $25\pm2^{\circ}\text{C}$; 5) Discharge the battery to the termination voltage at a constant power of P_{rd} , and rest for 10min; 6) Charge the battery to the termination voltage at a constant power of P_{rc} , and rest for 10min; 7) Discharge the battery to the termination voltage at a constant power of P_{rd} .	

8.3 安全性能 Safety Performances

备注: 电芯安全性可满足 GB/T 36276-2023 标准要求。

Remark: The cell safety performance meet GB/T 36276-2023 standard requirement.

序号 No.	项目 Item	标准 Criteria	测试方法和环境 Test Method and Condition
1	挤压性能 Crush Test	不漏液、不冒烟、 不起火、不爆炸、 不在防爆阀及泄 压点之外的位置 发生破裂 No leakage, no smoke, no fire, no explosion, no	初始化充电后的电池按以下方法操作: 挤压方向: 垂直于电池面积最大的外表面 挤压头: 半径为 75mm、长度大于电芯被挤压面尺寸 的半圆柱体 挤压速度: 5mm/s 挤压程度: 挤压力达到 50kN 时保持该挤压力 10min, 停止挤压, 观察 1h。 After Initialized charging, the battery shall be operated

 DESAY 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

		damage occurred at locations other than valves or leak points.	as follows: Crush direction: perpendicular to the largest surface of the battery Indenter type: a semi-cylinder with a radius of 75 mm and a length greater than the size of the extruded surface of the core Crush speed: 5 mm/s Crush extent: the battery is extruded until the extrusion pressure reach 50 kN, keep the pressure for 10min, stop crushing and observe for 1 h.	
2	短路性能 Short circuit Test	不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 No fire, no explosion, no damage occurred at locations other than valves or leak points.	电池单体初始化充电后，短路试验装置连接电池的正负极，调节试验装置电阻至 0.8~1.0mΩ；启动试验装置，在电池正负极之间形成电流回路，持续 10min 后断开电流回路，观察 1h。 Initialized charge the battery, the short-circuit test device is connected to the positive and negative poles of the battery, and the resistance of the device is adjusted to 0.8~1.0mΩ. The device is then activated to create a current loop between the positive and negative poles of the battery for 10 min. Afterward, the current loop is disconnected, and observe for 1h.	
3	跌落性能 Drop Test	不冒烟、不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 No smoke, no fire, no explosion, no damage occurred at locations other than valves or leak points.	电池单体初始化充电，将电池正极或负极朝下从 1.5m 高度处自由跌落到水泥地面上，观察 1h。 Initialized charge the battery, the battery tab down from 1.5 m high free fall to the cement ground with the tab towards the ground, observe for 1 h.	
4	过充电性能 Overcharge Test	不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 No fire, no explosion, no damage occurred at locations other	电池单体初始化充电，以 $I=P_{rc}/U_{nom}$ 恒流充电至电压达到其充电终止电压的 1.5 倍或时间达到 1h 时停止充电，观察 1h。 Initialized charge the battery, charge the battery to 1.5 times of the termination voltage or charging time reach 1h with the constant current of $I=P_{rc}/U_{nom}$, observe for 1 h.	

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

		than valves or leak points.	
5	过放电性能 Overdischarge Test	不漏液、不冒烟、不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 No leakage, no smoke, no fire, no explosion, no damage occurred at locations other than valves or leak points.	电池单体初始化放电, 以 $I=P_{rd}/U_{nom}$ 恒流放电至电压达到 0V 或时间达到 1h 时停止放电, 观察 1h。 Initialized discharge the battery, discharge the battery to 0V or discharging time reach 1h with the constant current of $I=P_{rd}/U_{nom}$, observe for 1 h.
6	过载性能	不漏液、不冒烟、不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 No leakage, no smoke, no fire, no explosion, no damage occurred at locations other than valves or leak points.	1) 电池单体初始化放电; 2) 以 $4P_{rc}$ 恒功率充电至终止电压, 静置 10min; 3) 以 $4P_{rd}$ 恒功率放电至终止电压, 观察 1h。 1) Initialized discharge the battery; 2) Charge the battery to the termination voltage at a constant power of $4P_{rc}$, and rest for 10min; 3) Discharge the battery to the termination voltage at a constant power of $4P_{rd}$, and observe for 1 h.
7	绝热温升特性 Adiabatic temperature rise characteristic	1) 电池表面温度小于或等于电池单体高温一级报警温度时, 温升速率 $< 0.02^{\circ}\text{C}/\text{min}$; 2) 不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 1) When the	1) 电池单体初始化充电, 置于绝热模拟装置中; 2) 加热电池至表面温度达 40°C 时保持当前温度, 静置 5h; 3) 继续加热电池至表面温度达 45°C 时保持当前温度, 静置 1h; 4) 控制装置恒定当前温度 20min; 5) 重复步骤 3)~4), 以 5°C 为步长逐次递增至电池表面温度为 130°C。 1) The battery is placed in the tester after initial charging; 2) Heat the battery until the surface temperature reaches 40°C, and maintain this temperature for 5h;

 DESAY 湖南德赛电池	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

		surface temperature of the battery is at or below the high temperature primary alarm temperature, the temperature rise rates $< 0.02^{\circ}\text{C}/\text{min}$; 2) no fire, no explosion, no damage occurred at locations other than valves or leak points.	3) Increase the temperature to 45°C , and maintain it for 1h; 4) Keep the device at the current temperature for 20 min; 5) Repeat steps 3)~4) in 5°C increments until the battery surface temperature reaches 130°C .
8	热失控性能 Thermal runaway	不起火、不爆炸、不在防爆阀及泄压点之外的位置发生破裂 No fire, no explosion, no damage occurred at locations other than valves or leak points.	1) 电池单体初始化充电后置于热失控试验装置中; 2) 以 $I=P_{rc}/U_{nom}$ 恒流充电, 启动加热; 3) 触发热失控的判定条件或温度达到 300°C 或试验时间达 4h 时, 停止充电和加热, 观察 1h; 4) 热失控的判定条件: 连续监测到三个温升速率值均 $\geq 3^{\circ}\text{C}/\text{s}$ 或起火或爆炸。 1) The battery is placed in the thermal runaway tester after initial charging; 2) Charge the battery with the constant current of $I=P_{rc}/U_{nom}$, and heating; 3) Trigger the judgement conditions of thermal runaway or when the temperature reaches 300°C or the test time reaches 4h, stop charging and heating, observe for 1h; 4) Determination conditions of thermal runaway: three successive temperature rise rates $\geq 3^{\circ}\text{C}/\text{s}$ or fire or explosion.

9.警告及注意事项 Warning and Caution

DESAY
湖南德赛电池

Cells must be applied in strict accordance with the specification. Abused of a battery may cause the battery to get heat, ignite, or explode and cause serious injury. Hunan Desay battery Co.,Ltd has no legal liability on any overheat, fire, explosion or other situations when the cells are used not according to the specifications. Be sure to abide by the safety rules as following:

- Do not disassemble cells; Do not put cells in water or fire.

- Please charge the cells with specified charger and follow the specifications. The cells can only be used in the specified equipment. It's not allowed for other applications.

- If the battery gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during usage, recharging or storage, immediately remove it from the device or battery charger and stop using it.

- Cell can't be placed or used near fire or where it is over 60°C or stored in such area.

- Do not connect the positive (+) and negative (-) terminals with a metal object; Do not put the cells together with necklace, hairpin, coins or screws or other metal.

- Please be careful and not damage the cells with sharp objects.

- Please read the operation manual carefully. Any improper operation may lead to overheat, fire, explosion, damage or loss of capacity.

Customer shall ensure that the following application conditions in connection with the products are strictly observed:

- HNSD, R. COP3, RD. 004

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

Customers should configure a battery management system to closely monitor, manage and protect each battery. When the cell is first used, it must be fully charged and discharged for activating it and giving fully capacity.

- 客户应向湖南德赛提供电池管理系统详细的设计方案、系统特点、框架、系统数据、格式等相关信息，以供湖南德赛对该系统进行设计评估，并建立电池管理档案。

Customer shall provide detailed information of the BMS, including but not limited to its design, features, and data file format to DESAY for design review and record keeping.

- 未经湖南德赛同意，客户不可擅自修改或者改变电池管理系统的设计和框架，以免影响电池的使用性能。

Once the detailed information of the BMS has been reviewed and agreed by DESAY, customer shall not modify or change the design, features, setting or data file format of the BMS without the prior written agreement by DESAY.

- 客户应保存完整的电池运转的监测数据，用作产品质量责任划分的参考。不具备完整的电池系统使用期限内的监测数据的，湖南德赛不承担产品质量保证责任。

Customer shall keep relevant records of the BMS monitoring data throughout the entire service life of each product, including keeping record of number of occurrence of rush charge, which could be used in the determination and judgment of any product warranty and liability claim entitlement. No warranty or liability claim should be considered without BMS diagnosis records (at a regular basis, esp. during maintenance) of the relevant product.

- 电池管理系统需满足以下最基本的检测和控制要求：

The BMS shall include the following monitoring and control features as a minimum requirement.

参数 Parameter	产品规格 Specification	保护动作 Action
充电终止 Stop charging	3.65V	电池的电压达到 3.65V 时，BMS 申请终止充电 Stop charging when cell voltage reaches 3.65 V
第一级过充电保护 First overcharge protection	$\geq 3.69V$	当电池电压达到 3.69V，BMS 强制终止充电 Stop charging when cell voltage reaches 3.69 V
第二级过充电保护 Second overcharge protection	$\geq 3.8V$	当电池电压达到 3.8V，BMS 强制终止充电，且 BMS 应锁定直到技术人员解决问题 When the battery voltage reaches 3.8V, the BMS is forced to terminate charging, and the BMS should be locked until technicians solve the problem.
放电终止 Stop discharge	最小 2.8V Minimum 2.8V	当电池的电压到达 2.8V，BMS申请终止放电 Minimize the discharging current when cell voltage reaches 2.8V.
第一级过放保护	最小 2.7V	当电池的电压到达 2.7V，BMS 强制终止放电

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

First over discharge protection	Minimum 2.7V	Stop discharging when cell voltage reaches 2.7V
第二级过放保护 Second over discharge protection	最小 2.2V Minimum 2.2V	当电池电压低于 2.2V 时, BMS 强制终止放电, 应及时以 0.1C 回充至 50% SOC, 且 BMS 应锁定直到技术人员解决问题 When the cell voltage is less than 2.2V, the cell should be charged back to 50% SOC at 0.1C in time, and the BMS should be locked until technicians solve the problem.
短路保护 Short circuit protection	不允许短路 No short circuit allowed	发生短路时, 由过流保护装置断开电池(电池) When a short circuit occurs, the battery (cell) is disconnected by the overcurrent protection device.
过流保护 Over current protection	参考充放电电流要求 Reference charge and discharge current requirements	电池管理系统控制充放电电流符合规格 Control discharge current by BMS to values within specification
过热保护 Over temperature protection	充电:55°C 放电:55°C Charge: 55°C Discharge:55°C	当温度超过本技术协议规定时, 终止充电/放电 Stop charging and discharging when temperature exceeds specification
充电时间过长保护 Charging time out limit	充电时间在8小时内 Charging completes within 8 hours	充电时间长于8小时, 则终止充电 If the charging time is longer than 8 hours, the charging will be terminated

备注: 以上第一级/第二级过充/放电保护为警示条款, 提请客户注意: 当电池达到上述任何一项条款描述的指标和参数状态时, 意味着电池已超出本技术协议规定的使用条件, 客户需依“保护动作”及本技术协议其他相关规定对电池采取保护措施, 同时, 湖南德赛声明对上述使用状态的电池质量不承担任何保证责任, 并对因此而导致的客户及第三方的任何损失不予赔偿。

Note: The above first/second level overcharge/discharge protection are the warning clause, draw the attention of customers: When the battery reaches any of the terms described in the above, means that the battery has been used beyond the specifications, the customer shall take protective measures on the battery in accordance with the "protection action" and other relevant provisions of this specification. At the same time, the DESAY shall not take any responsibility for the damage in connection therewith.

- 电芯使用过程中应充分考虑电芯的散热问题, 由于散热设计问题导致的电芯或电池过热损坏, 湖南德赛不承担质量保证责任。

The heat dissipation of the battery should be fully considered during the use of the battery. DESAY does not take the responsibility due to the overheating of the cell or batteries caused by the thermal design

	锂离子电池产品规格书	文件编号/版本
	Lithium-ion Battery Product Specification	Controlled No./Version
	Model: DLP50160118-100Ah	A00/V02

problem.

- 电芯使用过程中应充分考虑电芯的防水、防尘问题，所有设计必须满足 UL 和 IEC 有关标准规定的防水、防尘等级。由于防水、防尘问题而导致的电芯或电池的损坏（如腐蚀、生锈等），湖南德赛不承担质量保证责任。

During the use of the battery cell, the waterproof and dustproof problems of the battery cell should be fully considered. All designs meet the waterproof and dustproof grade stipulated by the relevant national standards. The DESAY does not take the responsibility due to damage to the cell or batteries (such as corrosion, rust, etc.) caused by water and dust.

11.运输及存放 Shipment and Storage

如无特别说明，我公司电池在 17~40%的荷电状态下运输，并做好抗震防护措施。电池存储应避免光照，远离热源和危险化学品，我们建议电池在 30~50%SOC 状态下存储，防止造成过放。长期存储请每三个月充放电一次，若无条件，我公司不承担质保责任。

Without special instructions, the cell should be shipment about 17~40%SOC, and do a good job for anti-vibration protection measures. Cells should be stored where it is cool, no light and away from heat sources and hazardous chemical, we advise the cells storage about 30~50%SOC, prevent overdischarge, please charge the cells every three months. Otherwise, we are not liable for warranty.

12.其他 Others

本说明未包括事项应由双方协商确定。

Any other which are not covered in this specification shall be agreed by both parties.